

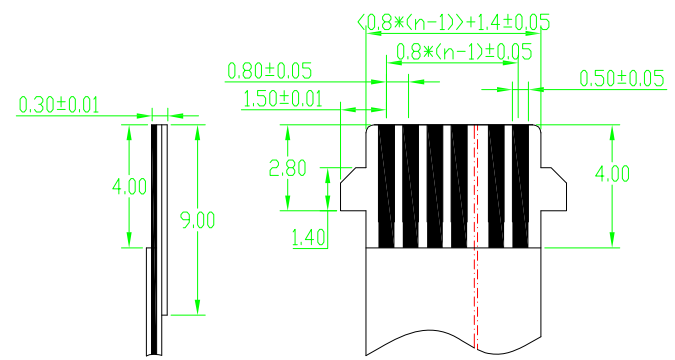
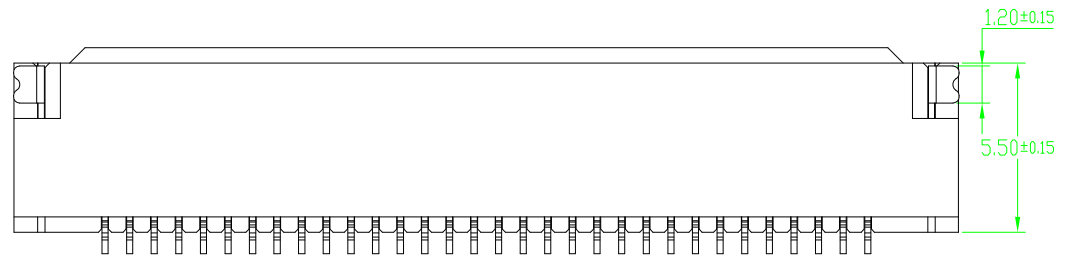



1.MATERIAL  
 HOUSING:LCP UL 94V-0  
 ACTUATOR:LCP UL 94V-0  
 CONTACTS:COPPER ALLOY  
 PEG:COPPER ALLOY  
 2.PLATING:  
 CONTACTS:TIN OVER NICKEL  
 PEG:TIN OVER NICKEL  
 3.PART NO:  
 OPERATING VOLTAGE:50V AC,DC  
 CURRENT RATING:0.3A AC,DC  
 OPERATING TEMPERATURE:-25C~+85C

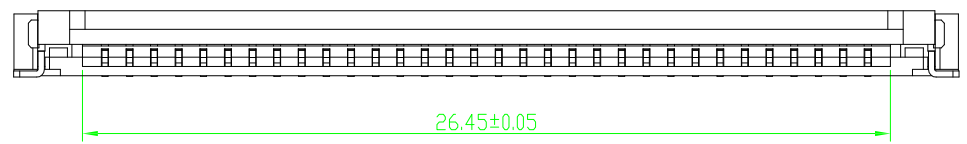

APPLICABLE FPC

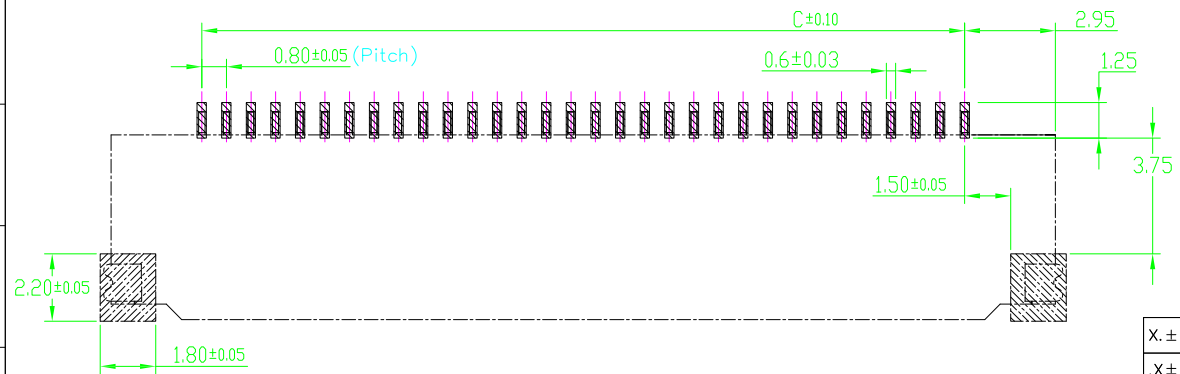

X.± 0.3	X°± 5°
.X± 0.25	.X°± 2°
.XX± 0.20	.XX°± 1°
.XXX± 0.10	.XXX°± 0.5°

UNITS mm	<b>QWYCONN</b> ® 深圳市启崴源电子有限公司 SHENZHEN QIWEIYUAN ELECTRONIC CO., LTD.								
MAT'L	PART NO.(INTENDED USE) 0820-32CL-SN	TITLE: 0.8翻盖32P							
FINISH	APPD:	DWG NO.: 0820-32CL-SN							
Q'TY PCS	CHKD:	DR: HU 2016.09.28	<table border="1"> <tr> <td>SCALE</td> <td>SHEET</td> <td>REV.</td> </tr> <tr> <td>1/1</td> <td>1/1</td> <td>A</td> </tr> </table>	SCALE	SHEET	REV.	1/1	1/1	A
SCALE	SHEET	REV.							
1/1	1/1	A							