


接触点在焊接处下面为：下接触

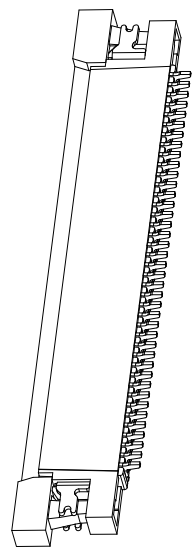

1. MATERIAL

HOUSING:LCP UL 94V-0
 ACTUATOR:LCP UL 94V-0
 CONTACTS:COPPER ALLOY
 PEG: COPPER ALLOY

2. PLATING:

CONTACTS:TIN OVER NICKEL
 PEG:TIN OVER NICKEL

3. PART NO.:

OPERATING VOLTAGE:50V AC,DC
 CURRENT RATING:0.3A AC,DC
 OPERATING TEMPERATURE:-25C~+85C

PIN 数	DIM=A	DIM=B	DIM=C	DIM=D
4Pin	10.50	9.30	3.00	5.10
6Pin	12.50	11.30	5.00	7.10
8Pin	14.50	13.30	7.00	9.10
10Pin	16.50	15.30	9.00	11.10

UNITS	MATL
mm	

QWYCONN 深圳市启威源电子有限公司
 SHENZHEN QIWEIYUAN ELECTRONIC CO., LTD.

PART NO.(INTENDED USE)
 1012-**-RI-SN
 TITLE:
 1.0拉拔下接触H1.2

FINISH	QTY	PCCS	SCALE	SHEET	REV.
X± 0.3 X± 0.25	X± 5' X± 2'		1/1	1/1	A
XXX± 0.20 XXX± 0.10	XX± 1' XXX± 0.5'				

DR: HU 2016.09.28
 DWG NO.: 1012-**-RI-SN