
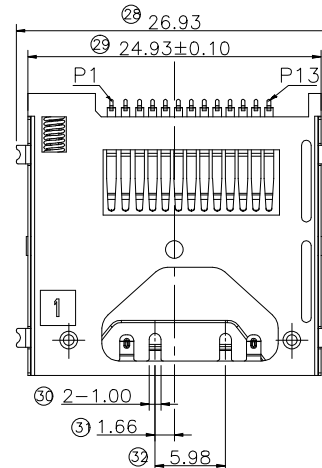
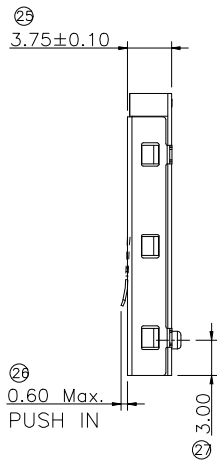
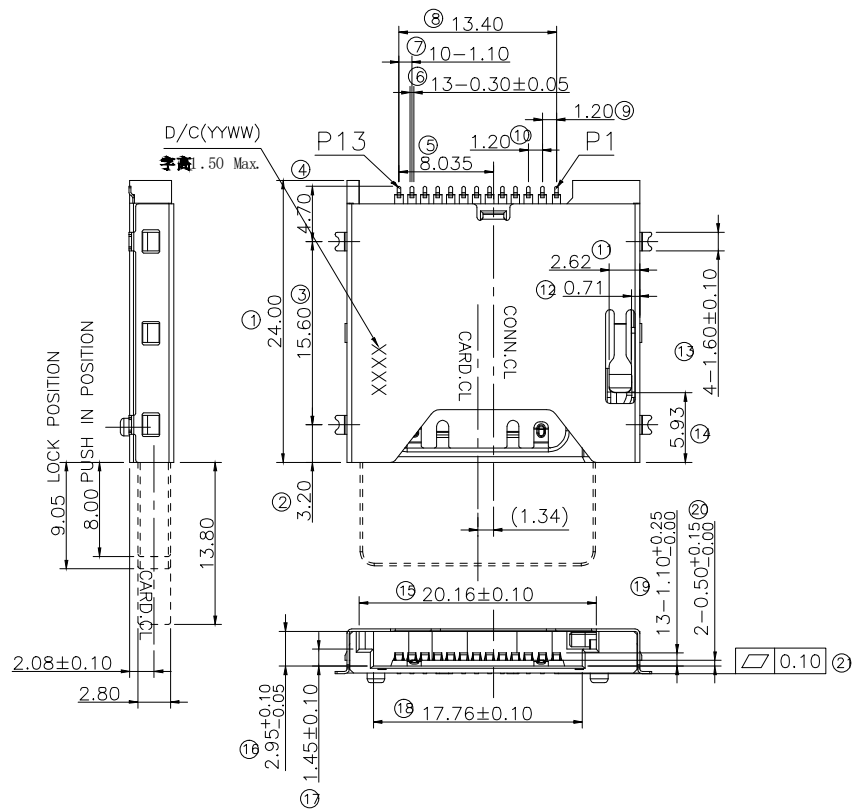
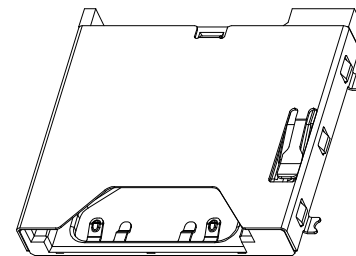


REV	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING	22.12.01	Jenply



2.Electrical Characteristics:

- Rated voltage : 500Vrms AC for 1 min.
- Current rating : 1.0 A.Min.per pin.
- Operating Temperature: -25°C~+85°C.
- Insulation resistance: 1000M ohms Min. at 500VDC for 1ms.
- Dielectric withstanding voltage:500 VAC/1minute.
- Contact resistance: Initial:55m ohms max. Final: Δ40m ohms max.
- Insertion Force: 25N Max.
- Removal Force: 0.5N Min. 20N Max.
- Inverse Insertion: 50N Min.
- Mating cycle: 10000 cycles, Spring is not breaking.

SPECIFICATION

- 1.Material:
- Housing: LCP S475, Rated UL94V-0,Color:Black.
 - Contacts: C7025 TM03
 - Matte Tin 80u"MIN. at Solder Tail, Plating 15U" on Contact Area.Over Nickle 50u"MIN.
 - Shell: SUS304 1/2H.
 - Goldflash at Solder Tail,Over Nickel 30u"MIN.Plated.
 - LOCK PIN: SUS304 3/4H. Not Plating.
 - SPRING: SWP-B. Not Plating.
 - CAM ROD: SUS304H. Not Plating.

P/N: 102000270151001

- Card Product
- Order number
- 11:gold flash
- 12:gold 3u"Min.
- 14:gold 10u"Min.
- 15:gold 15u"Min.
- 00:Tray packing
- 10:Reel packing
- Without Logo

DESIGN:	Jenply		MSTCONN 深圳德瑞电子有限公司 SHENZHEN DERUI ELECTRONICS CO.,LTD	
CHECK:	Ke Tian			
APPROVED:	Youquan Xu		TITLE: CF ExpressType A PUSH CONN	
DIM	TOL	DIM	TOL	PART NO. CAT-0003-13
X.	±0.25	X*	±3.0°	
X.X	±0.20	X.X*		
X.XX	±0.15	X.XX*		
X.XXX		X.XXX*		
REV.A	SCALE: N/A	UNIT: mm	SHEET: 1/1	