


適用FFC/FPC
APPLICABLE FFC/FPC

PIN	A	B	PIN	A	B
2	10.74	2.54	15	43.76	35.56
3	13.28	5.08	16	46.30	38.10
4	15.82	7.62	17	48.84	40.64
5	18.36	10.16	18	51.38	43.18
6	20.90	12.70	19	53.92	45.72
7	23.44	15.24	20	56.46	48.26
8	25.98	17.78	21	59.00	50.80
9	28.52	20.32	22	61.54	53.34
10	31.06	22.86	23	64.08	55.88
11	33.60	25.40	24	66.62	58.42
12	36.14	27.94	25	69.16	60.96
13	38.68	30.48	26	71.70	63.50
14	41.22	33.02	27	74.24	66.04

PCB LAYOUT

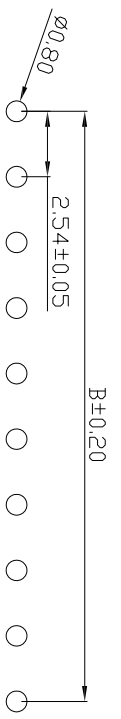

UNITS mm	MATL	FINISH	QTY	PCCS
X± 0.3	X± 2'	X± 5'		
X± 0.25	X± 2'	X± 1'		
X± 0.20	X± 1'	XXX± 0.5'		
XXX± 0.10				
PART NO.(INTENDED USE) 2.54-A-nPW		TITLE: 2.54MM 90° 薄膜插座		
APPD:		DWG. NO.: 2.54-A-nPW		
CHKD:		SCALE 1/1		
DR: HU 2016.09.28		SHEET 1/1		
		REV. A		



深圳市启威源电子有限公司
SHENZHEN QIWEIYUAN ELECTRONIC CO., LTD.

Remarks:
Plastic: PBF +25% GF (UL 94V-0)
Terminal: phosphor bronze C5191 R-H Nickel
15u" Min. Plated bright tin 30u" 50u" Min.
Performance:
Rated current: 1A, AC / DC
Rated voltage: 200V
Contact resistance: 30mΩ Max.
Insulation resistance: 1000MΩ MIN.
Withstand voltage: 500V RMS
Operating Temperature: -55 °C to +85 °C.